


HAMER USA

- Optional Coil Tap Middle Switch pos. → 1
- To Switch #3 → 2
- Optional Coil Tap NO Position → 3
- Optional Coil Tap Single Coil pos. → 4
- Bridge PU Hot (WHITE) → 5
- Bridge PU (Green/BLK) → 6
- Bridge PU (RED/BARE) → 7
- Transformer (WHITE)
- Middle PU HOT



- 9 → Driver CREEK/WHITE & Transformer BLACK
- 10 → Battery RED (+)
- 11 → Opt. power supply (ENG)
- 12 → Driver RED/BLACK
- 13 → To jack battery terminal
- 14 → Transformer GREEN
- 15 → To Switch #4
- 16 → To Vol. Pot #5
- 17

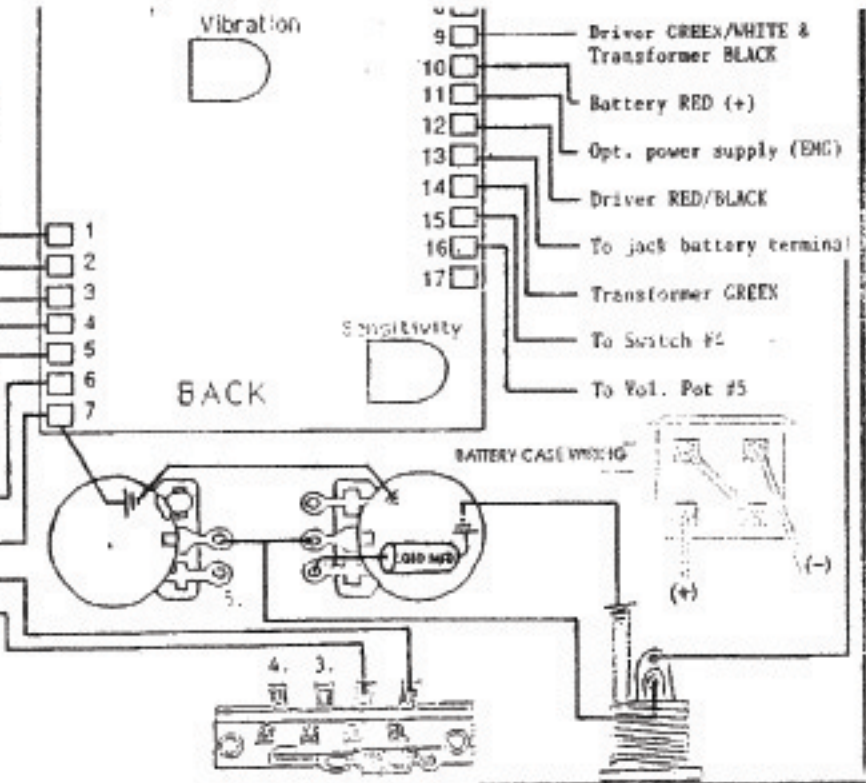

MODEL:

SUSTAINIAC GA-2

GCSS
GCSE

Special Instructions:

JW2 must be installed for bridge pickup to function without coil tap switch. With coil tap switch, JW2 must be removed. JW2 jumper wire is located on front side of circuit board near solder pads #3 & #4

www.hamerfanclub.com

DATE:

APRIL 21, 1991

DRAWN BY:

K. THEEL

Photo 1-13

Description:

1 Vol. / 1 Tone / 5-wax/GA-2 circuit board/Stereo jack/T1/PA2